

# COLE-TUVE, INC.



Model T/B-4



Model T/B-1.2



Model T/B-2.5

## TRIMMING & BEADING MACHINES (COMBINATION ROTARY MACHINES)



# TRIMMING AND BEADING MACHINES

(Combination Rotary Machines)

**COLE-TUVE's** Trimming and Beading Machines offer capacities and throat depths that are larger than those of other machines, and at prices that are much more affordable. There are three models, each equipped with a brake-motor for optimum usage and safety. The four sets of rolls shown below are included as standard equipment and other sets are available as options. The machines are CE certified for meeting stringent international standards for design, production and safety.

MODEL	T/B-1.2	T/B-2.5	T/B-4
Body Construction	Cast-Iron	Steel	Steel
Capacity: Mild Steel	18 ga.	12 ga.	5/32"
Maximum Depth of Material	9.45"	12.60"	19.68"
Length of Shafts	5.51"	9.84"	11.81"
Throat Depth	3.94"	2.76"	7.87"
Adjustable Guide Plate	Yes	Yes	Yes
Maximum Length of Flange that can be formed	.28"	5/16"	5/16"
Diameter of Shafts	1.69"	2.24"	3.39"
Diameter of Shafts (where rolls are mounted)	1.02"	1.38"	1.97"
Diameter of Standard Rolls	2.44"	3.78"	4.96"
Sets of Standard Rolls	8	4	4
Lower Roll Adjustable	Yes	Yes	Yes
Optional Hydraulic Roll Adjustment	No	Yes	Yes
Rolling Speed, FPM	21	16-1/2	16-1/2
Motor - 3/60/220/440 - HP	1	2	3
<i>A two-speed motor is available for 3/60/220 or 3/60/440 electrics</i>			
Dual Foot Control	Yes	Yes	Yes
Cabinet Base	Yes	Yes	Yes
Length x Width x Height	36" x 18" x 54"	56" x 22" x 44"	67" x 23" x 48"
Weight, lbs.	297	770	1100

All data are approximate; and data and design are subject to correction or change without prior notice.

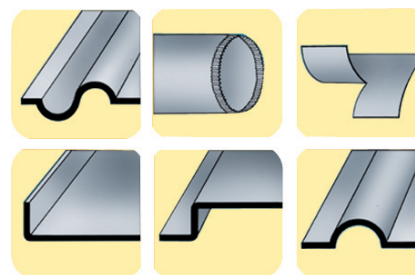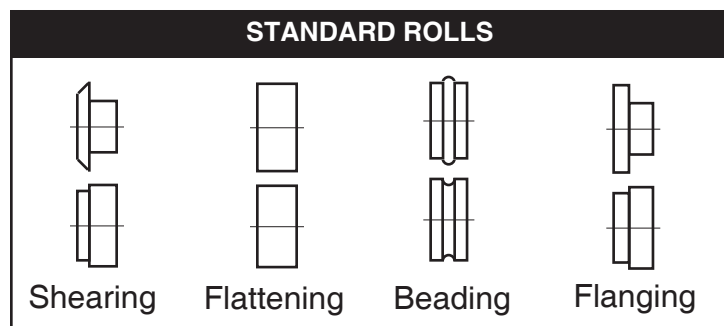

Applications

